




Tools needed.





Using a pair of scissors cut the end of the rope at an angle.



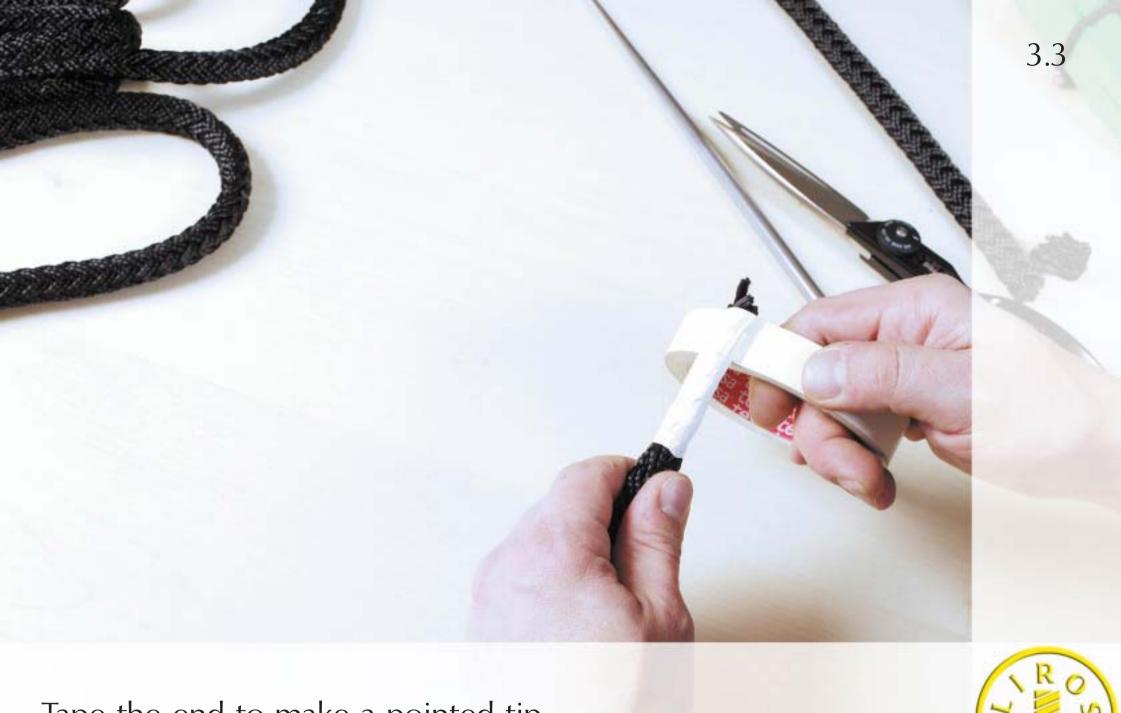

Tape the end to make a pointed tip.





After a distance of 40 x rope diameter push the taped end of the rope through the fixed part of the rope and pull it tight using the splicing tool.






Now push the long end of the rope through the short end and pull it tight.






Now wedge the taped end into the splicing tool and push it down the core.



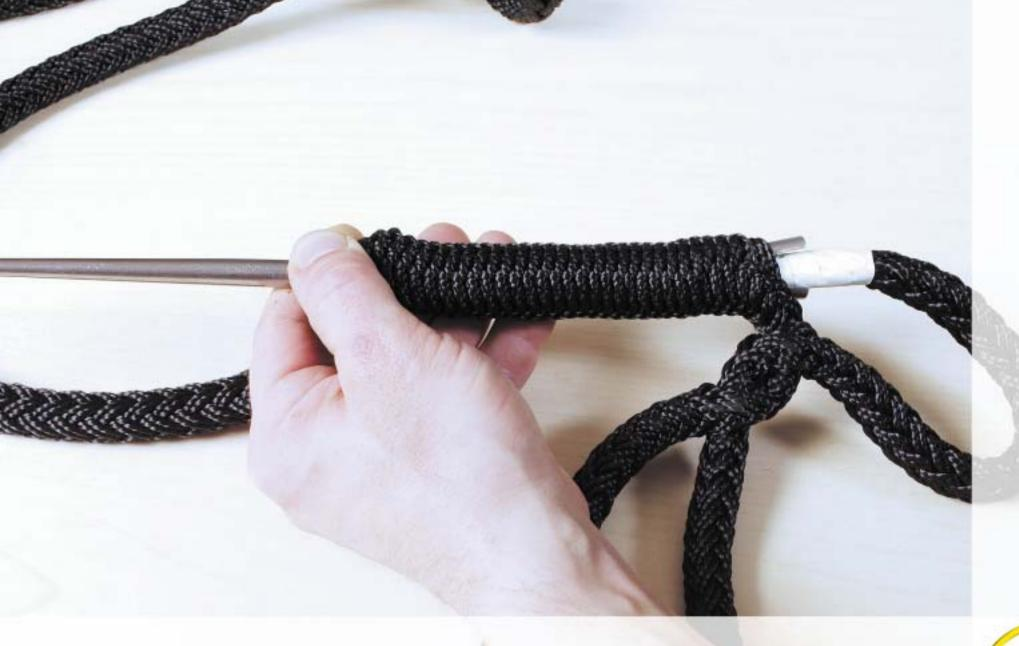

Pull the splicing tool all the way down. Its entire length and then extract it.

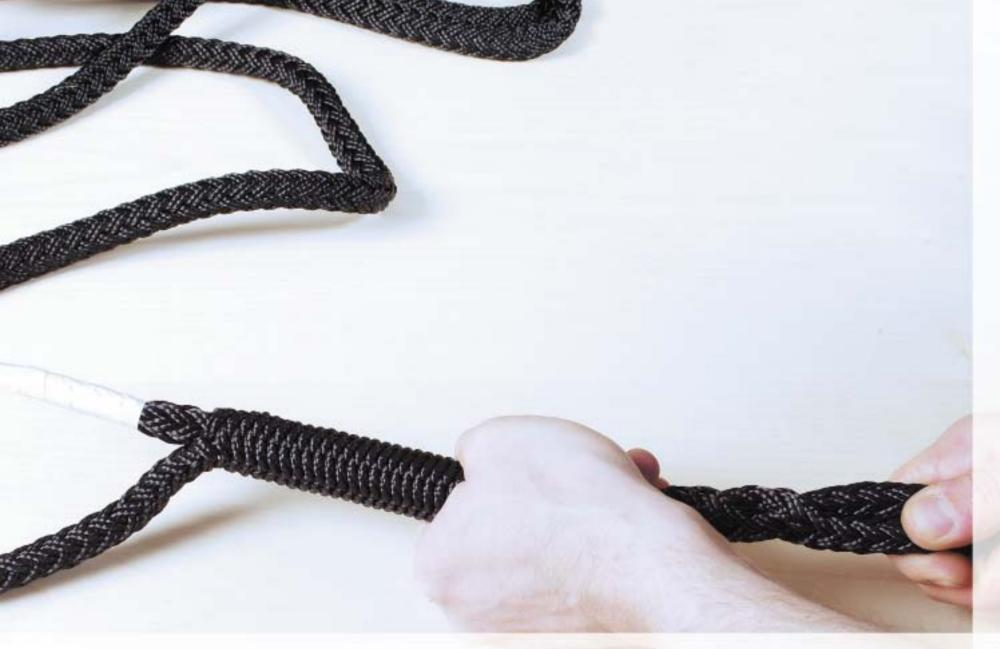

Remove the tape from the pointed tip and milk the cover so the end disappears.



